


# PP2 IN-PPS/2



Pneumatic pad shuttle

## OPTIONAL

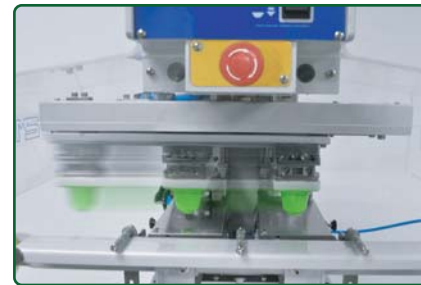

User-friendly: Steering up/down work table



Newly improved MS-100 machine stand enhances stability

## FEATURES

- 2 color automatic pad printer
- Pneumatic pad shuttle system (PPS)
- Rigid aluminium casting machine frame
- Use sealed ink cup set up
- Compatible with long life, economy of Green plate, thin steel plate and 10 mm steel plate
- Dead-on printing plate registration for quick job change  
Membrane switch control panel
- Automatic pad clean with programmable cleaning cycle
- Special functions: double ink / print cycles, dwell and delay before print
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

## SPECIFICATIONS

Ink cup :	Ø90 mm x 2
Ink cup plate size :	100 x 250 mm x 2
Max. speed : (dry cycle) *	850 cycles/hr.
Max. pad pressure :	750N at 6 bar
Power :	110/220V 50/60Hz 20W
Air consumption :	71 litre/min. (approx.)
Size : (LxWxH)	790 x 810 x 570 mm
Weight :	90 kg (approx.)

\*Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.