

# G-TURBO 130



Exclusive US Agent of:  
**KENT**  
INTERNATIONAL




PLC control touch screen panel



Stable granite stone machine structure



Platform in / out movement & pad clean underneath design for max. product size

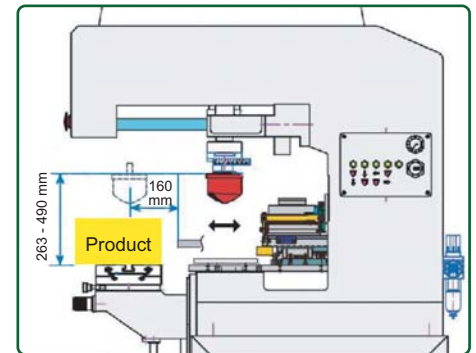

Maximum space for product/image with advantage of auto pad clean function

## FEATURES

- Single color automatic pad printer
- Granite stone machine structure for performance & stability as well as protect our environment
- Wide machine stand
- Platform in/out movement
- Pneumatic power machine operation
- Use sealed ink cup system
- Able to use laser engraved **Green plate**, thin steel plate and polymer plate
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

## SPECIFICATIONS

Ink cup size :	Ø125 & 130 mm
Printing plate size :	150 x 350 mm
Max. speed : (dry cycle) *	900 / hr.
Pad cylinder :	63 x 125 mm
Pad compression :	1,870N
Pad carriage stroke (in/out) :	247 mm
Power :	110/220V
Air consumption :	228 litre/min. (approx.)
Accuracy +/- :	0.05 mm
Size : (L x W x H)	974 x 760 x 1,680 mm
Weight :	320 kg (approx.)

\* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.