

## TURBO 130 (CE)




PLC control touch screen panel



Auto pad clean



Platform in / out movement

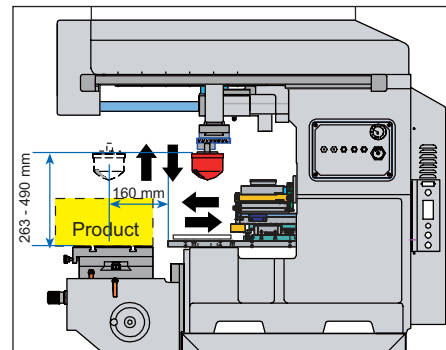

Maximum space for product/image with advantage of auto pad clean function

### FEATURES

- ¥ Single color automatic pad printer
- ¥ Rigid aluminium cast machine frame
- ¥ Platform in/out movement
- ¥ Pneumatic power machine operation
- ¥ Use sealed ink cup set up
- ¥ Compatible with long life thin steel, polymer, 10 mm steel and laser ALP plates
- ¥ Dead-on printing plate registration for quick job change
- ¥ PLC control touch screen panel
- ¥ Automatic pad clean with programmable cleaning cycle
- ¥ Pad stroke & speed adjustment
- ¥ Special functions: double ink / print cycles, dwell and delay before print
- ¥ Digital pad stroke (DPS) for variable printing depth
- ¥ Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- ¥ High speed and smooth machine operations

### SPECIFICATIONS

TCIC ink cup size :	~60, 70, 90 & 125 mm
Printing plate size :	100 x 250, 150 x 300 mm
Max. speed : (dry cycle) *	900 / hr.
Pad compression :	1,870N
Pad cylinder :	~63 mm
Pad carriage stroke (in/out) :	247 mm (Linear guide rail)
Power :	110/220V
Air consumption :	228 litre/min. (approx.)
Accuracy +/- :	0,05 mm
Size : (L x W x H)	974 x 810 x 1,690 mm
Weight :	380 kg (approx.)

\* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.