

TURBO 165




PLC control touch screen panel



Auto pad clean



Platform in / out movement
(Pad clean underneath)

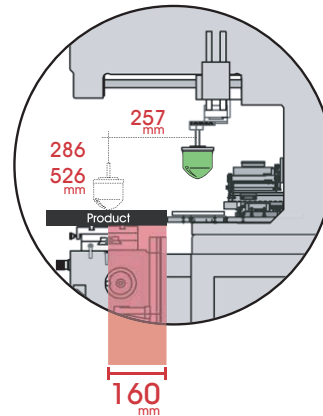

Maximized product space

Maximum space for product/image with advantage of auto pad clean function

FEATURES

- Single color automatic pad printer
- Rigid aluminium cast machine frame
- Wide machine stand
- Platform in/out movement
- Pneumatic power machine operation
- Use sealed ink cup set up
- Compatible with long life thin steel, polymer, 10 mm steel and laser ALP plates
- Dead-on printing plate registration for quick job change
- PLC control touch screen panel
- Automatic pad clean with programmable cleaning cycle
- Pad stroke & speed adjustment
- Special functions: double ink / print cycles, dwell and delay before print
- Digital pad stroke (DPS) for variable printing depth
- Hardened ground steel shaft with impregnated bushing ensure friction-free movement
- High speed and smooth machine operations

SPECIFICATIONS

Ink cup size :	Ø125, 130, 150, 165 mm
Printing Plate size :	150 x 300, 180 x 350, 200 x 350 mm
Max. speed : (dry cycle) *	800 / hr.
Pad compression :	3,016N
Pad cylinder :	80 mm (optional: 100mm)
Pad carriag stroke (in/out) :	248 mm
Power:	110/220V
Air consumption :	400 liter/min. (aprox.)
Accuracy +/- :	0.05 mm
Size : L x W x H	1,240 x 722 x 1,805 mm mm

* Please note that actual output may be affected by print requirement, ink drying condition, load/unload arrangement, pad stroke speed, pad hardness, production setup, product quality and production control.