


ALIEN 1000

Alien-100 stand alone or modular set



APPLICATIONS

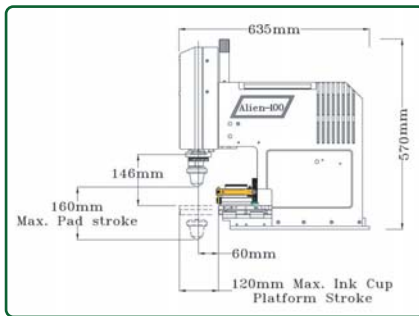

Stand alone with pad cleaning



2-station pneumatic Turntable



Automation in-line



Alien-in-line



6 or 8 Aliens on an indexing table

FEATURES

- User-friendly, high speed pad printer
- Rigid aluminium casting machine frame
- Pneumatic pad stroke
- APS : Automatic pad stroke by optical scale
- Compatible with long life, economy of **Green Plate**, 10 mm steel plate, thin-steel plate and polymer plate
- Dead-on printing plate registration for quick job change
- Automatic pad cleaning (optional) with programmable cleaning cycle.
- European safety CE standard
- RS-232 communication
- High speed and smooth machine operations
- Special functions: double ink / print cycles, dwell and delay before print
- Hardened ground steel shaft with impregnated bushing ensures friction-free movement

SPECIFICATIONS

Ink cup size :	Ø90 mm
Plate size :	100 x 250 mm
Max. print diameter for ink cup :	Ø80 mm (without tape clean) Ø60mm (with tape clean)
Max. print length for ink tray :	25 x 130 mm
Pad stroke :	0-160 mm (optional scale system)
Speed :	4,000 cycles/hr.
Max. pad pressure :	480N at 6 bar
Power :	110/220V 50/60Hz 30W
Air consumption :	110 litre/min.
Size : L x W x H	635 x 420 x 570 mm
Weight :	40 Kg